



tarazet




tarazet

Suspended light fixture TARAZET has a diameter of 70 mm and is designed for a ceiling mounting.

The fixture is supplied as a stand alone or in a sets of two to six fixtures where all the fixtures are mounted from a basic common profile.

The color is chosen by its interior usage, cold color heightens concentration, for living rooms and bedrooms calming warm color is recommended. Where the best color reproduction is needed, for reading for example, neutral colors are used.

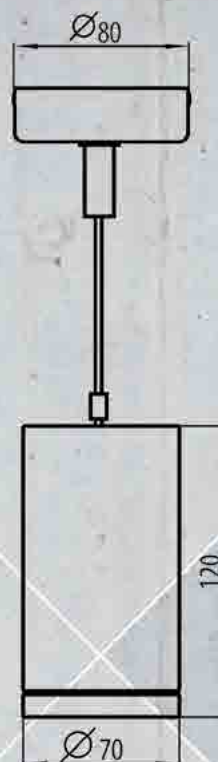

Variants and parameters of the light fixture Tarazet

type	circle light fixture on a cable suspension					
usage	can be used as stand-alone or in set up to six light as a ceiling lights					
basic fixture color	brushed stainless steel					
protection	IP 44					
length/width/height (mm)	70/70/120 1-6 pcs					The best selling model
light color	neutral (4000K)	cold (6000K)	warm (3000K)	mix (3000-6000K)	warm (3000K)	
diffuser	semi-clear matte	matte	pyramid		semi-clear matte	
mounting	cable					cable
light output/power input	200lm/3W, AC 230V	600lm/7W, AC 230V	700lm/8W, AC 230V	850lm/10W, AC 230V	600lm/7W, AC 230V	

Choose one option from each row and **create your own light fixture** to your liking and needs.

Benefits of the light fixture Tarazet

- Low consumption of DT LED LIGHTS guarantees:
- better energy savings, up to 8-10x against light-bulbs and 1.5-2x against fluorescent lights
- fast return of investment in case of whole light replacement
- Long life thanks to correct cooling. LEDs lasts at least 50,000 hours thanks to original Czech cooling design of LEDs which means non-stop lights for almost six years!
- Fidelity in color reproduction
 - neutral white, Ra > 85,
 - warm white, Ra > 80,
 - cold white, Ra > 80,
 - cold and warm white combination, Ra > 80.
- Flicker free - doesn't cause eyestrain like some fluorescent lights
- Immediate start - DT LED LIGHTS will achieve full brightness in one second. They are very suitable to spaces, where lights are often turn on and off. Due to their properties, there is no reduction of lifespan in these conditions.
- Low temperature resistant - lights can be used in very low temperature conditions, up to -20 °C (-4 °F).